


TISO road blockers can be used as anti-terror protection measures are designed as modules with different widths. Thereby, customer has an option to get different combinations of modules which will fit project purposes. In this case, TISO will provide you all required assistance to prepare the best project solutions. Except mentioned width, there is option to apply for customized solutions.



### TECHNICAL SPECS:

Model	Road blocker
Drive	Hydraulic
Rising height, mm (h)	600/800/1000
Width of blocked driveway, mm (L)	1000/2000/3000/4000
Installation depth, mm (H)	250/350
Maximum load per axis, t	20
Rising time, sec	3-4
Lowering time, sec	2-3
Protection level	IP 67 for Road blocker; IP 54 for control box
Road blocker finishing	- Structural steel: (galvanized or powder coated)
Operating temperature	-40 °C +60 °C (for temperatures lower than -10°C use the heating resistance)

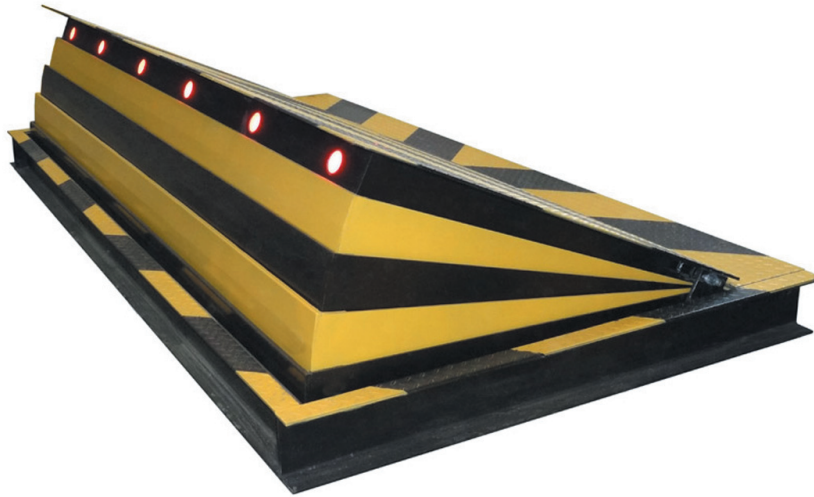